



'Excellence in **Energy Services** for over 100 years'

Casper, WY (307) 265-6550
 Conroe, TX (936) 539-5545
 Latrobe, PA (724) 424-9714
 Oklahoma City, OK (405) 631-1222

Denver, CO (303) 228-9406
 Odessa, TX (432) 257-7545
 Williston, ND (701) 572-9942
 Nisku, AB Canada (780) 979-6799



Mud Motor Specification Sheet

6.50" 7/8 4.8 (.33) 6.50" OD, 7/8 Lobe, 4.8 Stages

Physical Data

Bit size range	Bit box connection	Top sub connection	Maximum weight on bit	Maximum overpull
7 7/8" - 8 3/4"	4 1/2" Reg	4 1/2" XH Box	54,250 lbs	200,000 lbs

Recommended Drilling Fluid Properties


Sand content (Maximum)	Low gravity solids (LGS) (Maximum)	Total solids (Maximum)	pH	Aniline point (OBM) (Minimum)	Chlorides (Maximum)	Lost circulation material (LCM)
Trace	4%	8%	8 to 10	165° F	150,000 ppm	Thoroughly mix before pumping downhole

Performance Specifications

	Rev / Gal	Flow range	Speed range	Max operating diff pressure	Torque at max operating diff pressure	Stall diff pressure	Torque at stall pressure	Max temp for max operating diff pressure
NBR	0.33	250 - 500 GPM	83 - 165 RPM	720 psi	5,947 ft. lbs	1,080 psi	8,921 ft. lbs	150° F*
HR	0.33	250 - 500 GPM	83 - 165 RPM	1,080 psi	8,921 ft. lbs	1,620 psi	13,381 ft. lbs	150° F*

* For temperatures exceeding 150° F, please refer to Hunting's derating of differential pressure due to downhole temperature.

- HR Elastomer •
- NBR Elastomer •
- Torque •

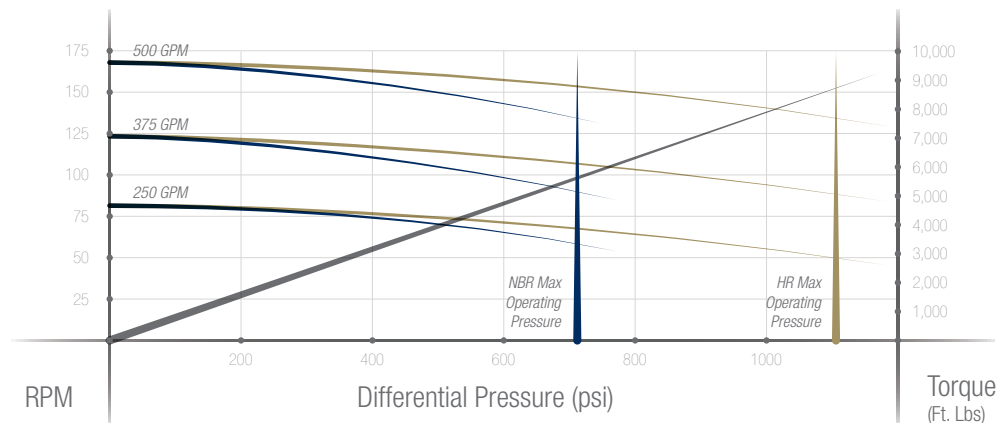

Dimensional Data

Continuous Maximum Rotary RPM

	Bit to Bend	Bit to Stabilizer	Overall Length	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
Straight	NA	31"	30 ft. 9 in	Straight Configuration: 80 RPM				
Fixed Bend	72"	31"	26 ft. 10 in	60	50	40	30	20
Adjustable	72"	31"	26 ft. 10 in	60	40	Not Recommended	Not Recommended	Not Recommended

Predicted Build Rates *Degrees / 100 Ft.*

Hole Size	Configuration	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
7 7/8" Hole	Slick	6.09	7.99	10.49	12.70	14.67
	Stabilized	8.10	9.66	11.72	13.53	15.15
8 1/2" Hole	Slick	4.20	6.10	8.61	10.81	12.78
	Stabilized	8.55	10.11	12.17	13.99	15.61
8 3/4" Hole	Slick	3.45	5.35	7.85	10.05	12.03
	Stabilized	8.74	10.30	12.36	14.17	15.79