



'Excellence in **Energy Services** for over 100 years'

Casper, WY (307) 265-6550  
 Conroe, TX (936) 539-5545  
 Latrobe, PA (724) 424-9714  
 Oklahoma City, OK (405) 631-1222

Denver, CO (303) 228-9406  
 Odessa, TX (432) 257-7545  
 Williston, ND (701) 572-9942  
 Nisku, AB Canada (780) 979-6799



# Mud Motor Specification Sheet

## 9.62" 5/6 4.0 (.11) 9.62" OD, 5/6 Lobe, 4.0 Stages

### Physical Data

Bit size range	Bit box connection	Top sub connection	Maximum weight on bit	Maximum overpull
12 1/4" - 24"	6 5/8" Reg or 7 5/8" Reg	6 5/8" Reg or 7 5/8" Reg	101,750 lbs	489,000 lbs

### Recommended Drilling Fluid Properties


Sand content (Maximum)	Low gravity solids (LGS) (Maximum)	Total solids (Maximum)	pH	Aniline point (OBM) (Minimum)	Chlorides (Maximum)	Lost circulation material (LCM)
Trace	4%	8%	8 to 10	165° F	150,000 ppm	Thoroughly mix before pumping downhole

### Performance Specifications

	Rev / Gal	Flow range	Speed range	Max operating diff pressure	Torque at max operating diff pressure	Stall diff pressure	Torque at stall pressure	Max temp for max operating diff pressure
NBR	0.11	650 - 1300 GPM	72 - 143 RPM	600 psi	15,054 ft. lbs	900 psi	22,581 ft. lbs	150° F*
HR	Contact a Hunting representative for more information							

\* For temperatures exceeding 150° F, please refer to Hunting's derating of differential pressure due to downhole temperature.

**NBR Elastomer •**  
**Torque •**

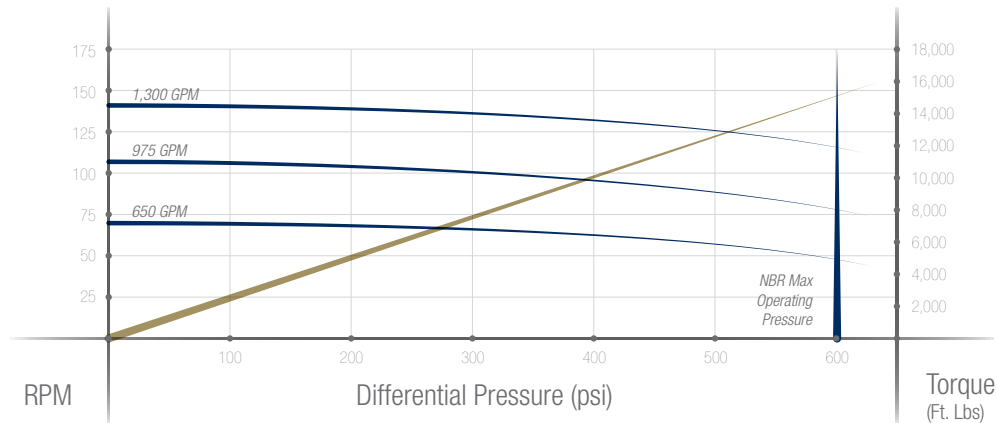

### Dimensional Data

### Continuous Maximum Rotary RPM

	Bit to Bend	Bit to Stabilizer	Overall Length	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
Straight	NA	46 1/2"	37 ft	Straight Configuration: 80 RPM				
Fixed Bend	105"	46 1/2"	32 ft. 9 in	60	50	40	30	20
Adjust-able	105"	46 1/2"	32 ft. 9 in	60	40	Not Recommended	Not Recommended	Not Recommended
TDS	Contact Hunting	NA	32 ft. 9 in	60	50	40	30	20

### Predicted Build Rates *Degrees / 100 Ft.*

Hole Size	Configuration	1.25° Bend	1.50° Bend	1.83° Bend	2.12° Bend	2.38° Bend
12 1/4" Hole	Slick	3.77	5.33	7.39	9.21	10.83
	Stabilized	7.12	8.35	9.90	11.42	12.70
17 1/2" Hole	Slick				0.25	1.88
	Stabilized	9.78	11.02	12.65	14.08	15.37